




COLOR FILTER TECHNICAL DATA SHEET

SWATCHBOOK: PERMACOLOR
 COLOR FILTER: #3660 DOUBLE COATED UV PASS
 DESCRIPTION: Permanent Color Filter
 MAX. TRANS.: 86%

COLORIMETRIC DATA

OBSERVER: CIE 1931 10 Degree
 SOURCE: • 'A' (tungsten)
 • 'D65' (daylight)

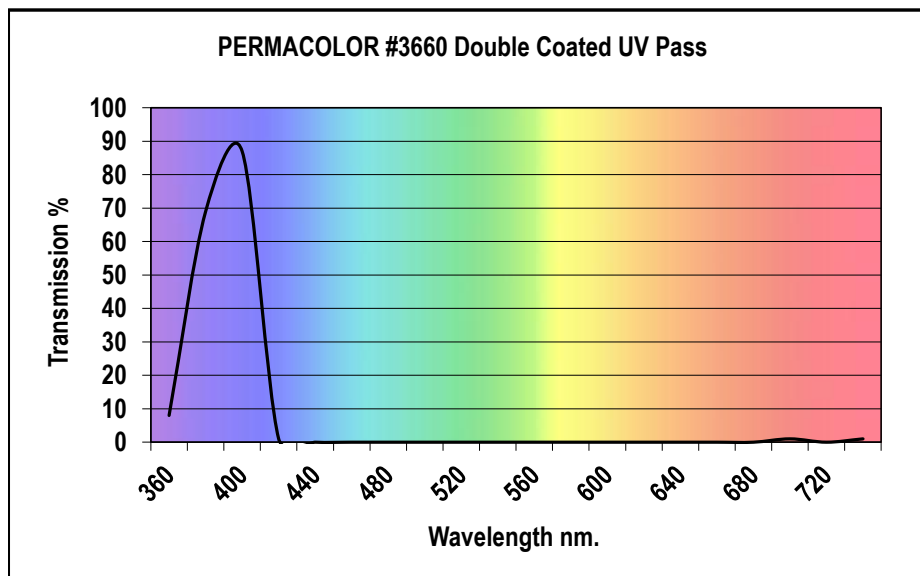


HUNTER LAB SOURCE A	
L*	0.510
A*	2.390
B*	12.520

HUNTER LAB SOURCE D65	
L*	0.58
A*	10.24
B*	17.48

CIE 1964 10° SOURCE A	
Y	0.060
(x)	0.247
(y)	0.114

CIE 1964 10° SOURCE D65	
Y	0.100
(x)	0.181
(y)	0.048

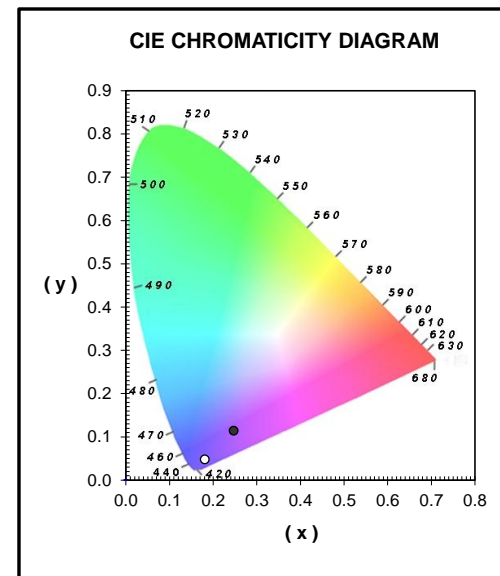

nm.	360	380	400	420	440	460	480	500	520	540	560	580	600	620	640	660	680	700	720	740
trans %	8	69	87	1	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1

MATERIAL SPECIFICATIONS:

General Description: Dichroic coated glass
 Substrate: Borosilicate
 Thickness: 1.75mm
 3.3mm and 1.1mm also available
 Manufactured in: U.S.A.

AVAILABLE SIZES:

Call
 Almost Any Size/Shape

