

Vibrant, Versatile Lighting Solutions

RoscoLED Tape Kits are engineered LED solutions that allow set designers and architects to incorporate dramatic accent lighting into their projects. These easy-to-use kits contain four reels of high-quality, fully tunable VariWhite LEDs (3000K to 6000K) or VariWhite Ultra LEDs (1800K to 6000K) with integrated power and dimming controls to provide high-output, high-CRI white light that adds a dynamic element to any installation. Flexible, field-cut-able and fully configurable options offer designers and filmmakers an easy way to integrate LEDs into their next project. All RoscoLED Tape products in the kits are certified to UL and CE standards and come with a 3-year warranty.



WHAT'S IN THE KIT

- (4) RoscoLED Tape VariWhite, 5m reels:
- (1) RoscoLED Control Box/400W/24V:
- (4) 5m connecting cables

Additional components are available to fully customize your project.


SPECIFICATIONS

RoscoLED Tape VariWhite, 5m reels:
LED Type: SMD2835
Color Temperature Options:
VariWhite: 3000K – 6000K
VariWhite Ultra: 1800K – 6000K
60CW LEDs + 60WW LEDs per meter
Output:
VariWhite: 1,500 lm/m
VariWhite Ultra: 1,400 lm/m
93 CRI / 92 TLCI
Voltage: 24VDC
Power Consumption: 19W/m or 95W per 5m reel
Lumen Maintenance: > 47,000 hours L70 at 105C
(IESNA LM-80-08 Standard)
Operating Temp: -4° F to 140° F (-20° C to 60° C)
IP Rating: IP43

KEY FEATURES

- High-quality white LED Tape: 93CRI / 92TLCI
- High output: up to 1,500 lumens per meter
- Tape reels pre-configured with 3-pin connectors for Plug-and-Play connectivity
- Power-balanced DMX addressable RoscoLED Control Box

RoscoLED Tape VariWhite Control Box/400W/24V:
Input Voltage: 90VAC – 264VAC via Neutrik Powercon connector
Output Voltage: 24VDC via (4) chassis mounted three-pin connectors
Rated Power: 400W
DMX: 5-Pin XLR In – RJ45 In/Out
Operating Temp: 32° F to 122° F (0° C to 50° C)
IP Rating: IP20

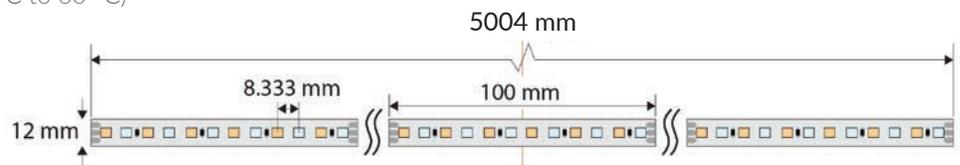

RoscoLED® Tape VariWhite Kits	
Item Code	Description
293220100020	RoscoLED Tape VariWhite Kit: 3000K-6000K
293220100021	RoscoLED Tape VariWhite Ultra Kit: 1800K-6000K

RoscoLED® Tape VariWhite Components & Accessories	
Item Code	Description
293221200005	RoscoLED Tape VariWhite: 3000K-6000K - 5m Reel
293221200006	RoscoLED Tape VariWhite Ultra: 1800K-6000K - 5m Reel
293222260000	RoscoLED Tape VariWhite Control Box/400W/24VDC
293222020001	RoscoLED 3-pin VariWhite Cable - 1M
293222020002	RoscoLED 3-pin VariWhite Cable - 2M
293222020003	RoscoLED 3-pin VariWhite Cable - 3M
293222020005	RoscoLED 3-pin VariWhite Cable - 5M
293222120000	RoscoLED 3-pin VariWhite Cable Splitter
293222020006	RoscoLED 3-pin VariWhite Male Connector w/Pigtail, 20cm
293222020007	RoscoLED 3-pin VariWhite Female Connector w/Pigtail, 20cm

RoscoLED® Tape Profiles	
Item Code	Description
2930R17080FR	RoscoLED Slim Rectangular Profile-1708, Frosted Lens, 2m
2931R1708CLR	RoscoLED Slim Rectangular Profile-1708, Clear Lens, 2m
2930R23080FR	RoscoLED Flush Mount Profile-2308, Frosted Lens, 2m
2930R2308CLR	RoscoLED Flush Mount Profile-2308, Clear Lens, 2m
2930R17SQ0FR	RoscoLED Rect. Profile-17SQ, Frosted Lens, 2m
2930R17SQCLR	RoscoLED Rect. Profile-17SQ, Clear Lens, 2m
293045090CLR	RoscoLED Corner Profile-1945, Clear Lens, 2m
2930450900FR	RoscoLED Corner Profile-1945, Frosted Lens, 2m
2930R20270FR	RoscoLED Square Profile-2027, Frosted Lens, 2m
2930R17230CL	RoscoLED Rect. Profile-1720 w/30° Lens, 2m
2930R171360C	RoscoLED Rect. Profile-1713 w/60° Lens, 2m
2930WD2615FR	RoscoLED Wide Profile-2615, Square Frosted Lens, 2m
2930R26230FR	RoscoLED Wide Profile-2623, Round Frosted Lens, 2m
2931R2027SPK	RoscoLED Tape Wide Profile Suspension Kit